The collection The contents

- 6 Our core technologies
- 10 Our product range
- 12 Electronics
- 40 Loudspeakers
- 76 Custom speakers
- 82 Specifications



Experience The extraordinary

Since 2005, Steinway Lyngdorf has been the pinnacle of the audio industry. Our name is, and always has been, synonymous with impeccable craftsmanship and 21st century technologies.

From the smallest electronic component to the grandest speaker, every product in the Steinway Lyngdorf line is pure perfection. Cutting-edge technologies combined with the touch of master craftsmen – that's the singular difference of Steinway Lyngdorf products.

Unique partnership Steinway & Sons

Designed, developed, and manufactured in Denmark, Steinway Lyngdorf sound systems are the only systems in the world that are qualified to be manufactured in partnership with Steinway & Sons.

Steinway Lyngdorf brings together Steinway & Sons, makers of the world's finest pianos for more than 165 years, and Peter Lyngdorf, one of the most forward-thinking audio innovators of our time. The partnership is based on an ambitious promise – that the Steinway Lyngdorf audio systems reproduce the sound of a Steinway & Sons grand piano to the degree that even seasoned concert pianists can not discern the difference.








The world's most sophisticated solution RoomPerfectTM



In simplest terms, we have rewritten the rule book for what is required to achieve pure, accurate sound quality in any environment.


RoomPerfect[™] is one of the world's most sophisticated solutions for adapting the sound system to the environment. It delivers an uncompromised sound experience equally well to living rooms, media rooms, and home theaters, with far less demands to design the room around the sound system.





Bas

Management



With our systems, you are able to pinpoint even the lowest frequencies in a 360 degree circle around you. Thus, bass notes are replayed exactly the way the sound engineer intended.

Boundary Woofers



Able to handle the lowest frequencies with unprecedented speed and accuracy, our boundary woofers dramatically improve attack and timing when placed in the recommended position.

Perfect Performance



Our amplifiers and processors feature technologies that decrease main power requirements, eliminate the need for a power conditioner, and increase reliability. With passive cooling, they are an energyefficient addition to any Steinway Lyngdorf series.

Our PRODUCT RANGE











State-of-the-art processing

For large theaters and clients with access to first-run content, the P300 offers two optional input boards, an AES3 or an AES67 board, allowing seamless integration with DCI-compliant processors and servers.

For these connoisseurs, multiple P300 processors may be stacked together allowing one to map out up to 64 channels of native decoding making it compliant with any commercial cinema specification The P300 offers full support for all immersive sound formats such as Dolby Atmos®, DTS:X, and AURO-3D®, as well as 4K and 3D video, HDCP 2.2, and advanced HDMI switching.

The P300 features full HDMI matrix functionality between the 8 HDMI inputs and 5 outputs (one being HDBaseT), and this new masterpiece now supports the HDMI 2.1 feature eARC with Dynamic Lip-Sync as well as the latest decoding and post-processing formats.



Built-in Media player

The P300 features a built-in media player, which connects to services like Spotify, Airplay and Roon as well as internet radio. Through a cabled network or USB connector, you can access your FAT32 based library of music and enjoy it in stereo or upmixed to enjoy it on a multi-channel format. *The perfect sound with* RoomPerfectTM

Like all Steinway Lyngdorf systems, the P300 come equipped with our proprietary RoomPerfectTM room-correction software, the world's most sophisticated technology for adapting the sound system to the environment. Our advanced voicing tool allows one to create up to 32 unique custom voicings perfectly tailoring the performance to the content and personal preferences.







Packed with Technology

Equipped with the advanced technologies for which Steinway Lyngdorf is known, including RoomPerfect[™] and fully digital signal processing, the P200 delivers digital high-definition surround sound experiences in the absolute highest quality.

The P200 has full support of immersive surround sound formats such as Dolby Atmos®, DTS:X, and AURO-3D®, as well as 4K and 3D video, HDCP 2.2, and advanced HDMI switching. It decodes 12 native channels and supports up to 256 speakers through the Steinway Lyngdorf Digital Link.

Advanced HDMI switching

The P200 features advanced HDMI switching capabilities and can handle up to five separate 4K video streams simultaneously, allowing routing from the HDMI inputs to any output with unique On Screen Display for each stream. It can also show four inputs up to 1080P on one screen (tiling), or split one input to be shown on four screens as a video wall.

Steinway & Sons P100





The ideal Media center

With a built-in media player and the ability to decode 10 native channels, the Steinway & Sons P100 is ideal as a media center for slightly smaller surround systems and high-performance stereo systems. The P100 is equipped with the advanced technologies for which Steinway Lyngdorf is known, including RoomPerfect[™] and fully digital signal processing. P100 supports all video resolutions up to 600MHz pixel clock, including 4K with the new high dynamic range formats.

Full support of Every audio format

Like the larger P300 and P200 processors, the P100 offers support of all audio format, including the latest in immersive surround sound formats. It can intelligently optimize the received audio formats to your speaker setup.







Exquisite Stereo

Ideal for music connoisseurs who demand the very best in stereo processing, the Steinway & Sons SP-1 stereo processor is a stereo experience like none you've ever imagined.

The SP-1 is fully digital, features RoomPerfect[™], and is simple to use. The SP-1 pairs perfectly with the CDP-1 CD player as well as any Steinway Lyngdorf component for a stereo sound experience that meets your needs. No matter how you configure the system, the SP-1 guarantees powerful and true-to-life audio performance.







The 2-channel A1 and 4-channel A2 fully digital amplifiers are unique in their construction as well as their performance. They are the premier choice for both stereo and surround sound setups.

Both amplifiers utilize true digital amplification ensuring that the signal processing is handled entirely in the digital domain - without any sound-deteriorating analog conversions.

Foundation in the Steinway Lyngdorf line

The A1 and A2 do the heavy lifting for every stereo and surround sound system in the Steinway Lyngdorf line. The amplifiers are a lot more than power amblifiers - they handle the cross-over points, filters etc. By handling all of this in the amplifiers in stead of the processor, the Steinway Lyngdorf systems are completely scalable and can easily adapt to any room or system size.



The A1 and A2 are not only incredibly smart, they are also designed with green lifestyle practices in mind. The amplifiers are amazingly efficient which lowers the power requirements, eliminates the need for power conditioners and most importantly, reduces heat output which eliminates the need for a cooling system in most conditions. This efficiency and low heat output combined with exquisite build quality extends lifespan and increases reliability.











Meet the CDP-1, the CD player that truly complements the superior technology and exquisite quality of the entire Steinway Lyngdorf product line. Designed with sophistication, the CDP-1 offers clear and crisp sourcing for the best audio experience.



The CDP-1 is built with a thick vibration-free chassis frame with a vibration-damped lid, which gives it a rock-solid construction. But don't let its stout presentation fool you. With its clean lines and sleek black Steinway finish, the CDP-1 is a sharp, elegant addition to any audio system.

Steinway & Sons

HEAD UNIT PROCESSOR





A statement Processor

Together with the iconic volume wheel, the Head Unit Processor is the perfect partner for in-room statement speakers like the Steinway & Sons Model O, B, C, and D speaker systems.

Featuring HDMI inputs and outputs, the Head Unit Processor can function as a media center for high-performance stereo systems and surround sound systems (up to 12 native channels). It also supports immersive audio formats and advanced video formats including 4K with the new high dynamic range (HDR) formats.

Steinway & Sons REMOTE CONTROL







The Steinway Lyngdorf remote control for stereo and surround sound systems features a rotating wheel crafted from solid, gold-plated or chromeplated brass and mounted on precision-machined Swiss bearings.

It's elegance you can touch, integrity you can feel. It provides intuitive and total command of your Steinway Lyngdorf system.

Steinway & Sons MODEL D





A flagship Masterpiece

The Model D by Steinway Lyngdorf offers one of the most exquisite audio experiences in the world. This flagship masterpiece is designed for the most discriminating audio aficionado.

Combining state-of-the-art innovations in sound reproduction with finely-crafted aesthetics, the Model D is the first and best system of its kind.

Carugged powerhouse of Strength and performance

The Model D is a full range floor-standing dipole speaker which emits sound from both front and back. Unrestricted by the vibrations of conventional cabinets, it interacts with the room like a Steinway & Sons grand piano does, resulting in extremely open and life-like musicality, with no resonance and no coloration.

With more than 170 hours of precision machining behind each speaker, the Model D speaker is a rugged powerhouse of strength and performance.

Steinway & Sons MODEL B





Powerful and Impressive

The Steinway & Sons Model B not only looks powerful with its impressive line-up of drivers, but together with our digital amplification, the resulting sound reproduction is nothing short of stunning.

A dipole speaker requires a large front area to separate the front and rear radiation of low frequency sound. In the Model B, the sides are elegantly folded back to add to the acoustic width of the speaker. Furthermore, the six woofer drivers add up to an extremely large radiating surface capable of producing a linear output down to 25 Hz.

Full effect of The reflecting sound

A dipole speaker generally works with the room acoustics, unlike normal box speakers, and if the room and décor are not completely symmetrical around the speakers, RoomPerfect[™] will clean up the negative effects to the sound.

The Steinway Lyngdorf Model B is an engineering work of art and an integral member of the impressive line-up of Steinway & Sons speakers.

Steinway & Sons MODEL O





A single Sleek package

This full-range loudspeaker is designed to provide the legendary Steinway & Sons performance in a sleek package without the need for a separate woofer.

The Steinway & Sons Model O functions impeccably as a surround speaker or a simple stereo setup, and its small footprint makes it a perfect alternative to wall mounted speakers.

A stunning Performance

Like all Steinway Lyngdorf speakers, the Model O utilizes an Air Motion Transformer (AMT) for high frequency reproduction. The AMT has an active surface area has an active surface four times bigger than a normal dome tweeter. The resulting resolution and stress-free movements ensure the correct and detailed reproduction of all overtones of the instruments playing.

The midrange driver is a specially designed 6" aluminum driver with a large neodymium magnet. This driver is extremely efficient yet compact in size, making it the ideal solution for maximizing performance while minimizing cabinet size. The driver is paired with an 8" slave unit to provide full-range reproduction and impactful bass.

Steinway & Sons MODEL C





The live Sound

The Model C speaker system is for those who seek the live dipole sound and demand enhanced bass for music and movies. The formula is simple: take the legendary Model D, then scale down the footprint and add powerful boundary woofers. The result is an attention-grabbing statement system that sets a new standard for full-bodied bass reproduction, making it perfect for stereo and surround sound.



Dipole Speaker

The Model C's compact, floor-standing dipole design emits equal, natural sound from both sides of the cabinet – forward and backward. Thus it produces sound that interacts with the room much like a live musical instrument, creating audio that can't be compared and a statement that can't be ignored.

Boundary Woofers

A freestanding addition to the Model C speaker, the proprietary boundary woofer concept was developed to manage bass tones and play with the environment, not against it. With the use of boundary woofers, direct sound and reflections from the environment arrive at the listening point at exactly the same time, thus improving sound attack and timing. This makes the Model C series an ideal choice for those who seek the live dipole sound but demand a deeper base for home cinema and bass-heavy music genres.

Steinway & Sons MODEL S





A match Made in heaven

The Model S series is the small system with big reach, thanks to the S-15 speaker and S-210 boundary woofer.

The S-15 is a sleek speaker featuring a cabinet CNC-machined from solid aluminum and the innovative AER (Ambience Enhancing Radiation) dipole tweeter design. The S-210 boundary woofer is a floor-standing woofer that delivers powerful and tonally accurate bass in a discreet footprint.



The performance of the Model S series is nothing short of extraordinary. Recognized with numerous awards and accolades, the series has been installed in hundreds of high performance home cinemas and living rooms all over the world.

It is petite and so discreet it can be installed without compromising décor, and it is the clear choice for those seeking perfection in a compact design.

Steinway & Sons





Your design style Dynamic and flexible

The Model M series is perfect in a statementmaking, high-gloss configuration or a hidden, discreet installation – it's anything you want it to be.

The series' slim and stylish architectural speakers can be mounted on or in walls and ceilings, partially or completely concealed. Whether a large home theater or an intimate living room, your environment reflects your design style. The Model M just makes it sound better.

Strong and powerful A world-class athlete

The Model M's speaker cabinets are 100% aluminum, employing internal bracings and a thick front to hold the drive units in place. This dampens resonance and increases efficiency, and compared to wood cabinets, the Model M's structure minimizes gross volume. It's like a world-class athlete – flexible, powerful, and undeniably strong.

Steinway & Sons





Floor-standing Speakers

The LS Concert, and its smaller brother the LS Studio, blend the dipole design from the flagship Model D with the line source approach from the in-wall LS speakers. At just over 8 and 6.5 feet tall, these open baffle speakers are for rooms where a sound system must sound – and look – impressive.

In-wall and in-room Boundary woofers

The LS series offers dedicated in-wall and in-room boundary woofers which match the incredible power of the LS speakers. Stacking options are fully customizable – you can use just one pair for a smaller room, or stack multiple boundary woofers to achieve the same sound pressure in even the largest venues.



Number one choice Pinnacle sound system

The LS series is the number one choice for larger rooms and spaces with rows of elevated seats. The collection offers commanding floor-standing and modular in-wall speakers, and simply outperforms any other similar system on the market.

You choose whether to keep the focus on the entertainment experience with the in-wall series or to have a system where the speakers make a visual statement of their own with the floorstanding speakers.


Perfect For every seat

The LS series features an innovative line source approach incorporating floor-to-ceiling speakers and boundary woofers.

This design allows sound to propagate undistorted over long distances, ensuring that every seat in the room has the same volume level and tonal consistency.





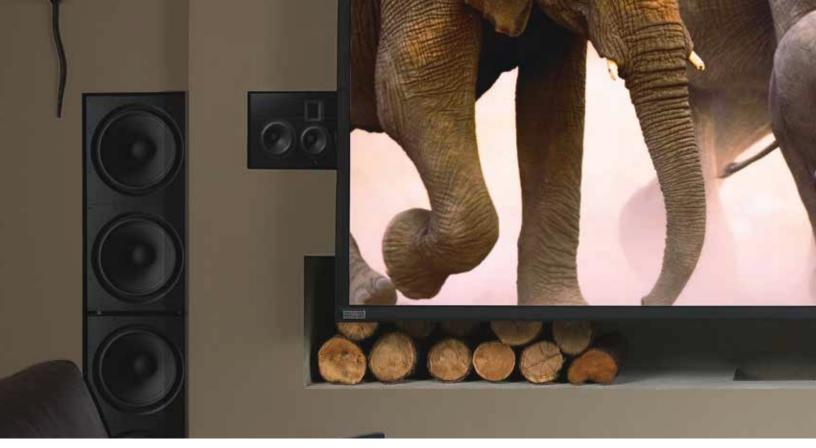

Invisible High performance

The In-Wall series speakers are specifically designed to be placed behind acoustically transparent screens, fabric panels, and metal mesh grills. With invisible presence, the In-Wall series offers exceptional performance, versatility, and unbeatable appeal.

This series can be mixed-and-matched with any other item in our product range while maintaining the outstanding performance of each individual component.



With a large cabinet size combined with highly efficient drivers, the IW-15, IW-16, IW-26H and IW-26V in-wall speakers have an overall increased sensitivity, allowing for improved dynamic headroom and sound pressure level (SPL) while using less power.

Designed for use as a front speaker in medium and large high-performance home theaters, the IW-66 is a grand performer. It combines striking power with advanced technologies to ensure the most stunning sound experience possible in medium and large home theaters.



The in-ceiling Speakers

The IC-26 in-ceiling speaker is the perfect choice for immersive sound formats, as its angled design allows for optimum coverage of the entire listening area. It is designed for perfect performance when placed inside a wall or ceiling.

The IC-16 speaker is a perfect alternative to the S-16IW for installations requiring angled speakers for immersive sound.

Fully encompassing experience with The boundary woofers

A stunningly powerful surround sound system can be built by combining the in-wall speakers with any of our standard or custom in-wall boundary woofers. Our woofers provide a fully encompassing experience, and when placed against the recommended boundaries, the direct sound and reflections arrive at the listening position at the same time, ensuring tight bass and accurate timing.

Dedication to The ultimate cinema experience

78





Large scale Hollywood theaters

Steinway Lyngdorf commits to a new level of support for the Digital Cinema Initiative (DCI) with a collection of speakers designed for the ultimate Hollywood cinema and large format screening rooms.

The X speakers are made specifically for both private and commercial projects that demand the highest possible performance. Designed for dedicated in-wall use, the X speakers are based on the already high-performing In-Wall Series but offer a more powerful level of performance.

The Xtreme versions

The collection includes two unique in-wall and in-ceiling speakers. The Steinway & Sons X-261 speaker is the extreme version of the successful IW-26V speaker, redesigned and utilizing the more powerful air motion transformer (AMT) from the flagship Model D speaker. This gives the speaker an additional 4dB more peak output, for a total of 120dB with 93.5 dB sensitivity. For even greater output, the X-262 operates without a filter in an active crossover bi-amped version, which adds another 2dB of peak output for a total of 122 dB.

For immersive height channels, the X-261C is the in-ceiling solution, providing a performance upgrade to the IC-26 speaker currently available. The X-262C is the bi-amplified version.













Steinway Lyngdorf offers custom products to accommodate special installations and challenging design requirements like shallow wall depths, marine installations, and non-standard room structures.

We also offer bespoke exquisite wood finishes and contemporary custom high-gloss colors to complement your home décor. Using timehonored techniques, trained craftsmen ensure that the finish of each component attains the highest standard of quality.

Your space is your own – and your sound system should sing your unique song.

ACCESSORIES



Optional Accessories

The S-15 speaker has two optional accessories for ideal performance when placed on the floor, shelf or tabletop. The elegant table stand is low-profile and directs the sound up towards the listener from a low table or counter position.

The floor stand comes in two designs, freestanding or boundary. The boundary floor stand is used position the speaker close against the wall or boundary for optimal performance while the freestanding stand provides additional stability when away from the wall.



The In-Wall Series is designed for easy installation with a solid backbox for in-wall and in-ceiling use.

The installation is completed with a sleek bezelless grill for a clean finish.

SPECIFICATIONS


(1)





Steinway & Sons P300 surround sound processor

| Decemination | Deale manual and for a standing and and and and and and |
|--|--|
| Description | Rack mount or freestanding surround sound processor |
| Key features | RoomPerfect™, capable of handling up 256 output channels, HDCP 2.2, 4K resolution, 3D video |
| Decoding | Dolby Atmos®, DTS:X, AURO-3D®, and all legacy formats, 16 native channels |
| Inputs | Audio: 8 x HDMI [™] (≤192kHz/24bit), 1 x AES/EBU S/P-DIF input (≤192kHz/24bit), 3 x S/P-DIF coaxial inputs (≤192kHz/24bit), 4 x S/P-DIF optical inputs (≤96Hz/24bit), 1 x USB audio input (≤192kHz/32bit), 1 x microphone input (XLR) for RoomPerfect [™] |
| | Video: 8 x HDMI™ (2.0b – HDCP 2.2), accepts 3D 30Hz, 4K 60Hz (18Gbps), accepts HDR10, Dolby Vision and HLG |
| Outputs | Audio: 5 x Steinway Lyngdorf Digital Links (CAT 5e based), 1 x single ended stereo analog output for secondary audio output (Zone 2), 1 x SPDIF coax digital stereo output for secondary audio output (Zone 2 / Fix: 96kHz/24bit) |
| | Video: 4 x HDMI™ (2.0b – HDCP 2.2), 1 x HDBaseT™ |
| Audio specifications | Frequency response: ±0,5dB from 20 to 20,000 Hz, |
| Total harmonic distortion | 0.005% max from 20 to 20,000 Hz |
| EQ | RoomPerfect™, 32 x adjustable voicings holding ≤8 shelving, high/low pass or parametric filters with adjustable gain and Q |
| Mediaplayer | Internet radio (vTuner), Spotify connect, DLNA Support of FAT32 based media storade, Airplay, Roon Endpoint (awaiting certification) |
| Control interfaces | 1 x DB9 RS232 connector, 2 x IR sensor inputs, 1 x IR output (loop from one of the sensor inputs), 1 x trigger input, 4 x trigger outputs, 1 x RJ45 ethernet LAN connector, 2 x USB connectors (backup, updates + FAT32 media storage), 1 x SD card slot (backup - storage for system software and settings) |
| Optional modules | 16 channel DCI-compliant digital AES3 (DB25) or AES67 input for movie servers and processors (≤192kHz/32bit) |
| Dimensions (H x W x D) Freestanding | 13.8 x 45.0 x 34.2/39.6* cm 5.4 x 17.7 x 13.4/15.4* in |
| Dimensions (H x W x D) Rack mount | 13.3 x 45.0 x 34.2/39.6* cm 5.1 x 17.7 x 13.4/15.4* in (3RU high) |
| Weight | 6.6 kg / 14.6 lbs |
| Finish | Matte black |
| ltem no. | 900100070 |
| Comments | * Incl/excl cables |





| _ | | | |
|----|--|--|-----|
| E | | | -1 |
| | | | — h |
| 4 | | | |
| Ϋ́ | | | - |
| | | | 11 |
| 1 | | | |
| | | | |

Steinway & Sons P200 surround sound processor

| • | Description | Rack mount or freestanding surround sound processor |
|------------|--|--|
| | Key features | RoomPerfect™, capable of handling up to 256 output channels, HDCP 2.2, 4K resolution, video scaling, 3D video, advanced HDMI™ switching, Dolby Atmos®, DTS:X, AURO- 3D®, HDR video |
| <u>= 1</u> | Decoding | Dolby Atmos®, DTS:X, AURO-3D®, and all legacy formats, 12 native channels |
| | Input | Audio: 1 x AES/EBU S/P-DIF input, 3 x S/P-DIF coaxial inputs, 4 x S/P-DIF optical inputs, 1 x USB audio input, 1 x Balanced stereo analog input (XLR), 4 x Single ended stereo analog inputs (RCA), 1 x Multichannel single ended analog input (RCA), 1 x Microphone input (XLR), 1 x 16-ch digital AES/EBU input (optional upgrade) |
| | | Video: 8 x HDMI™ with full resolution |
| | Output | Audio: 5 x Steinway Lyngdorf Digital Links (CAT 5e based) 1 x Stereo analog for secondary audio output (RCA) 1 x S/P-DIF coaxial digital output |
| | | Video: 4 x HDMI™ - ARC compatible, 1 x HDBaseT connector / All with full resolution |
| | Miscellaneous | 1 x DB9 RS232 connector, 2 x IR sensor inputs, 1 x IR output (loop from one of the sensor inputs), 1 x Trigger input, 4 x Trigger outputs, 1 x RJ45 Ethernet, LAN connector, 2 x USB connectors, 1 x SD card slot (storage of system settings and calibration) |
| | Interface options | RS232, IP, web interface, ihiji, Remote Control app on iOS and Android platforms |
| | Optional modules | 12 channel DCI-compliant digital AES3 (DB25) |
| | Dimensions (H x W x D) Freestanding | 13.8 x 45.0 x 34.2/39.6* cm 5.4 x 17.7 x 13.4/15.4* in |
| | Dimensions (H x W x D) Rack mount | 13.3 x 45.0 x 34.2/39.6* cm 5.1 x 17.7 x 13.4/15.4* in (3RU high) |
| | Weight | 6.7 kg / 14.8 lbs |
| | Finish | Matte black |
| | ltem no. | 90010001x |
| | Comments | * Incl/excl cables |






| <u> </u> | |
|----------|----|
| 1 | 1 |
| L | له |

Steinway & Sons P100 surround sound processor

| Description | Rack mount or freestanding surround sound processor |
|--|--|
| Key features | RoomPerfect™, capable of handling up to 10 output channels, HDCP 2.2, 4K resolution, video scaling, 3D video, Dolby Atmos®, DTS:X, AURO-3D®, HDR video |
| Decoding | Dolby Atmos®, DTS:X, AURO-3D®, and all legacy formats, 10 native channels |
| Input | Audio: 1 x AES/EBU S/P-DIF input, 3 x S/P-DIF coaxial inputs, 4 x S/P-DIF optical inputs, 1 x USB audio input, 1 x Balanced stereo analog input (XLR), 4 x Single ended stereo analog inputs (RCA), 1 x Multichannel single ended analog input (RCA), 1 x Microphone input (XLR), |
| | Video: 3 x HDMI™ with full resolution |
| Output | Audio: 5 x Steinway Lyngdorf Digital Links (CAT 5e based) 1 x Stereo analog for secondary audio output (RCA) 1 x S/P-DIF coaxial digital output |
| | Video: 1 x HDMI™ with full resolution & ARC compatible |
| Miscellaneous | 1 x DB9 RS232 connector, 2 x IR sensor inputs, 1 x IR output (loop from one of the sensor inputs), 1 x Trigger input, 4 x Trigger outputs, 1 x RJ45 Ethernet, LAN connector, 2 x USB connectors, 1 x SD card slot (storage of system settings and calibration) |
| Interface options | RS232, IP, web interface, ihiji, Remote Control app on iOS and Android platforms |
| Dimensions (H x W x D) Freestanding | 13.8 x 45.0 x 34.2/39.6* cm 5.4 x 17.7 x 13.4/15.4* in |
| Dimensions (H x W x D) Rack mount | 13.3 x 45.0 x 34.2/39.6* cm 5.1 x 17.7 x 13.4/15.4* in (3RU high) |
| Weight | 6.6 kg / 14.6 lbs |
| Finish | Matte black |
| Item no.: | 900100018 |
| Comments | * Incl/excl cables |





Steinway & Sons SP-1 stereo processor

| Description | Rack mount or freestanding stereo processor |
|--|---|
| Key features | 2 channel RoomPerfect™, digital delay, voicings, graphic display |
| Input | Digital: 4 x S/P-DIF optical inputs, 6 x S/P-DIF optical inputs 1 x USB audio input |
| | Analog: 4 x Single ended stereo analog inputs (RCA) 1 x Microphone input (XLR) |
| Output | 3 x Steinway Lyngdorf Digital Link (CAT 5e based) |
| Miscellaneous | 1 x Trigger input, 1 x IR sensor input 1 x USB (software update), 1 x RJ 12 (RS 232 control) |
| Dimensions (H x W x D) Freestanding | 4.9 x 45.0 x 26.5/31.5* cm 1.9 x 17.7 x 10.4/12.4* in |
| Dimensions (H x W x D) Rack mount | 4.4 x 45.0 x 26.5/31.5* cm 1.7 x 17.7 x 10.4/12.4* in (1RU high) |
| Weight | 5 kg / 11 lbs |
| Finish | Matte black |
| ltem no. | 90010030 |
| Comments | * Incl/excl cables |



4


•

Steinway & Sons A1 fully digital amplifier

| Description | Rack mount or freestanding 2 channel fully digital power amplifier |
|--|--|
| Key features | Active Eq., voicings, crossover, time delay |
| Input | 1 x Steinway Lyngdorf Digital Link (CAT 5e based) 1 x RJ12 RS232 connector |
| Output | 1 x Steinway Lyngdorf Digital Link (CAT 5e based) 2 x Speakon® speaker output |
| Power rating | 2 x 400W @4 Ohm |
| Dimensions (H x W x D) Freestanding | 4.9 x 45.0 x 34.6/39.6* cm 1.9 x 17.7 x 13.6/15.6* in |
| Dimensions (H x W x D) Rack mount | 4.4 x 48.3 x 34.6/39.6* cm 1.7 x 19 x 13.6/15.6* in (1RU high) |
| Weight | 6.6 kg / 14.6 lbs |
| Finish | Matte black |
| Item no. | 90010020 |
| Comments | * Incl/excl cables |









Steinway & Sons A2 fully digital amplifier


| Description | Rack mount or freestanding 4 channel fully digital power amplifier |
|--|---|
| Key features | Active Eq., voicings, crossover, time delay |
| Input | 1 x Steinway Lyngdorf Digital Link (CAT 5e based) 1 x RJ12 RS232 connector |
| Output | 1 x Steinway Lyngdorf Digital Link (CAT 5e based) |
| | 4 x Speakon® speaker output |
| Power rating | 4 x 400W @4 Ohm |
| Dimensions (H x W x D) Freestanding | 8.7 x 45.0 x 34.6/39.6* cm 3.4 x 17.7 x 13.6/15.6* in |
| Dimensions (H x W x D) Rack mount | 8.2 x 48.3 x 34.6/39.6* cm 3.2 x 19 x 13.6/15.6* in (2RU high) |
| Weight | 9.5 kg / 21.0 lbs |
| Finish | Matte black |
| ltem no. | 90010040 |
| Comments | * Incl/excl cables |






Steinway & Sons CDP-1 CD player

| Description | Freestanding CD player |
|------------------------|---|
| Key features | Red Book CD play back, state-of-the-art sample rate converter with 24 bit up-sampling, Inter-sample Clipping Correction, integrated Steinway Link operation with SP-1 |
| Audio outputs | 1 x Optical; 1 x SPDIF, 2 x Digital Link (CAT 5e based) |
| Miscellaneous | 1 x USB (software update), 1 x RJ 12 (RS 232 control) |
| Dimensions (H x W x D) | 4.9 x 45.0 x 27.7/32.7* cm 1.9 x 17.7 x 10.5/12.5* in (1RU high) |
| Weight | 4.2 kg / 9.3 lbs |
| Finish | Matte black |
| ltem no. | 90010060 |
| Comments | * Incl/excl cable CDP-1 can be controlled by any Steinway Lyngdorf processor or control system |



Steinway & Sons Head Unit Processor


| Description | Surround sound processor |
|------------------------|---|
| Key features | CD Player; Control Unit; Volume wheel with display; RoomPerfect™, capable of handling up to 256 output channels |
| Decoding | Dolby Atmos®, DTS:X, AURO-3D®, and all legacy formats, 12 native channels |
| Input | 3 x S/PDIF; 1 x AES-EBU; 1 x Toslink (Optical) 3 x analog single ended, 1 x analog balanced; 1 x input for microphone |
| Output | 4 x Steinway Lyngdorf Digital Link (CAT 5e based) |
| Dimensions (H x W x D) | 104.2 x 44.0 x 39.6 cm 40.9 x 17.3 x 15.6 in |
| Weight | 57.0 kg / 125.7 lbs |
| Finish | High-gloss black with gold or chrome accents Custom colors and wood finishes available |
| ltem no. | 900130105 |






Steinway & Sons Remote Control

| Description | RF remote control for Model D & C and Model SP-1; Dedicated version for Model P100, P200 and P300 |
|--------------------|--|
| Dimensions (Ø x H) | Ø 10.0 x 6.3 cm Ø 3.9 x 2.5 in |
| Weight | 0.95 kg / 2.1 lbs |
| Finish | Gold or chrome |
| ltem no. | 900130302 |



Steinway & Sons Model D speaker

| Description | Floor-standing dipole speaker |
|------------------------|---|
| Frequency response | 20 - 22k Hz |
| Max SPL @ 1m | 117 dB |
| Amplification needed | 2 channels or built-in |
| Dimensions (H x W x D) | 205.8 x 46.4 x 79.7 cm 81.02 x 18.27 x 31.27 in |
| Weight | 174.0 kg / 383.6 lbs |
| Finish | High-gloss black with gold or chrome accents Custom colors and wood finishes available |
| Item no. | 90013020x |




Steinway & Sons Model B speaker

| Description | Floor-standing dipole speaker |
|------------------------|---|
| Frequency response | 25 - 22k Hz |
| Max SPL @ 1m | 115 dB |
| Amplification needed | 4 channels |
| Dimensions (H x W x D) | 124.3 x 60 x 30.6 cm 49 x 24 x 12 in |
| Weight | 140 kg / 308 lbs |
| Finish | High-gloss black with gold or chrome accents Custom colors and wood finishes available |
| ltem no. | 90013180x |




Steinway & Sons Model O speaker

| Description | 2-way floor-standing speaker with slave unit |
|------------------------|---|
| Frequency response | 35 - 22k Hz |
| Max SPL @ 1m | 105 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 115 x 36 x 14 cm 43.3 x 14.2 x 5.5 in |
| Weight | 37 kg / 81.6 lbs |
| Finish | Black piano finish Custom colors and wood finishes available |
| ltem no. | 90013180x |
| | |




Steinway & Sons Model C speaker


| Description | Floor-standing dipole speaker |
|------------------------|---|
| Frequency response | 250 - 22k Hz |
| Max SPL @ 1m | 117 dB |
| Amplification needed | 1 channel or built-in |
| Dimensions (H x W x D) | 132.7 x 30.0 x 54.0 cm 52.24 x 11.81 x 21.26 in |
| Weight | 64.8 kg / 142.9 lbs |
| Finish | High-gloss black with gold or chrome accents Custom colors and wood finishes available |
| ltem no. | 90013022x |



Steinway & Sons Model S-15 speaker


| Description | Bookshelf, on-wall, on-ceiling, floor-stand speaker |
|------------------------|--|
| Frequency response | 120 – 22k Hz |
| Max SPL @ 1m | 114 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 26.0 x 20.0 x 7.9 cm 10.2 x 7.8 x 3.1 in |
| Weight | 4.4 kg / 9.7 lbs |
| Finish | Matte black, satin silver, high gloss black, high gloss white Custom colors available |
| ltem no. | 90013025x, 90013026x |






Steinway & Sons Model S-210 boundary woofer

| Description | Floor-standing boundary woofer |
|------------------------|--|
| Frequency response | 25 – 500 Hz |
| Max SPL @ 1m | 114 dB (117 dB corner) |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 37.3 x 36.0 x 36.0 cm 14.7 x 14.2 x 14.2 in |
| Weight | 20.5 kg / 45.2 lbs |
| Finish | Matte black, satin silver, high gloss black, high gloss white Custom colors available |
| ltem no. | 90013025x, 90013026x, 90013027x |




Steinway & Sons Model M center speaker

| Description | On-wall, semi in-wall, in-wall speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 114 dB |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 27.0 x 50.0 x 10.0 cm 10.6 x 19.7 x 3.9 in |
| Weight | 9.5 kg / 20.9 lbs |
| Finish | Matte black; high-gloss black with gold or chrome accents Custom colors available |
| ltem no. | 900130241 |



Steinway & Sons Model M left/right speaker

| Description | On-wall, semi in-wall, in-wall, in-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 114 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 50.0 x 27.0 x 10.0 cm 19.7 x 10.6 x 3.9 in |
| Weight | 8.5 kg / 18.7 lbs |
| Finish | Matte black; high-gloss black with gold or chrome accents Custom colors available |
| ltem no. | 900130234, 900130231 |




Steinway & Sons Model M boundary woofer

| Description | Floor-standing boundary woofer |
|------------------------|---|
| Frequency response | 20 - 500 Hz |
| Max SPL @ 1m | 117 dB (120 dB corner) |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 44.6 x 48.2 x 45.5 cm 17.6 x 19.0 x 17.9 in |
| Weight | 35 kg / 77.2 lbs |
| Finish | High-gloss black with gold or chrome accents Custom colors available |
| ltem no. | 90013024x |




Steinway & Sons LS concert left/right speaker

| Description | Floor-standing dipole line source speaker |
|------------------------|--|
| Frequency response | 120 - 22k Hz |
| Max SPL @ 1m | 132 dB (equivalent to a conventional point source SPL @ 1m) |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 249.1 x 40.0 x 46.0 cm 98.1 x 15.7 x 18.1 in |
| Weight | 58.4 kg / 128.8 lbs |
| Finish | High-gloss black with matte gold or black accents Custom colors available |
| ltem no. | 900130215, 900130216 |



Steinway & Sons LS studio left/right speaker


| Description | Floor-standing dipole line source speaker |
|------------------------|--|
| Frequency response | 120 - 22k Hz |
| Max SPL @ 1m | 131 dB (equivalent to a conventional point source SPL @ 1m) |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 200.7 x 40.0 x 46.0 cm 79.0 x 15.7 x 18.1 in |
| Weight | 73.0 kg / 161.0 lbs |
| Finish | High-gloss black with matte gold or black accents Custom colors available |
| ltem no. | 900130213, 900130214 |



Steinway & Sons LS left/right speaker

| Description | In-wall stackable speaker |
|------------------------|---|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 130 dB* |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 49.2 x 35.0 x 15.0 cm 19.4 x 13.8 x 5.9 in |
| Weight | 18 kg / 39.7 lbs |
| Comments | Minimum 4 modules |
| Finish | Matte black |
| ltem no. | 900130250, 900130251 |
| * = : : | |


* Equivalent to a conventional point source SPL @ 1m



Steinway & Sons LS center speaker

| Description | In-wall stackable speaker |
|------------------------|---|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 130 dB* |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 49.2 x 35.0 x 15.0 cm 19.4 x 13.8 x 5.9 in |
| Weight | 18 kg / 39.7 lbs |
| Comments | Minimum 4 modules |
| Finish | Matte black |
| Item no. | 900130252 |

 * Equivalent to a conventional point source SPL @ 1m



Steinway & Sons LS boundary woofer

Description Frequency response Max SPL @ 1m Amplification needed Dimensions (H x W x D)

Weight Finish

Item no

In-wall stackable boundary woofer 20 - 500 Hz 117 dB (120 dB corner) 1 channel 73.8 x 35.0 x 33.0 cm 29.1 x 13.8 x 13 in 33.5 kg / 73.9 lbs Matte black 900130255




Steinway & Sons LSR-212 boundary woofer

| Description | In-room stackable boundary woofer |
|------------------------|--|
| Frequency response | 20 - 500 Hz |
| Max SPL @ 1m | 117 dB (120 dB corner) |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 71.0 x 45.0 x 27.0 cm 28.0 x 17.7 x 10.6 in |
| Weight | 35.5 kg / 78.3 lbs |
| Finish | Matte black, high-gloss black, high-gloss white Custom colors available |
| ltem no. | 90013042x |




Steinway & Sons LSR-210 boundary woofer

| Description | In-room stackable boundary woofer |
|------------------------|--|
| Frequency response | 25 - 500 Hz |
| Max SPL @ 1m | 114 dB (117 dB corner) |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 61.5 x 38.9 x 23.3 cm 24.2 x 15.3 x 9.2 in |
| Weight | 30.5 kg / 67.3 lbs |
| Finish | Matte black, high-gloss black, high-gloss white Custom colors available |
| Item no. | 90013042x |




Steinway & Sons IW-15 speaker

| Description | In-wall, in-ceiling speaker |
|------------------------|---|
| Frequency response | 100 – 22k Hz |
| Max SPL @ 1m | 114 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 26.6 x 20.0 x 9.5 cm 10.5 x 7.8 x 3.7 in |
| Weight | 3.5 kg / 7.7 lbs |
| Finish | Matte black |
| ltem no. | 900140261 |




Steinway & Sons IW-16 speaker

| Description | In-wall, in-ceiling speaker |
|------------------------|--|
| Frequency response | 80 – 22k Hz |
| Max SPL @ 1m | 114 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 28.6 x 28.6 x 9.5 cm 11.2 x 11.2 x 3.7 in |
| Weight | 5.7 kg / 12.6 lbs |
| Finish | Matte black |
| ltem no. | 900140262 |




Steinway & Sons IW-26V speaker

| Description | In-wall, in-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 116 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 57.0 x 31.0 x 9.5 cm 22.4 x 12.2 x 3.7 in |
| Weight | 11.3 kg / 24.9 lbs |
| Finish | Matte black |
| Item no. | 900140263 |
| | |




Steinway & Sons IW-26H speaker

| Description | In-wall speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 117 dB |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 31.0 x 57.0 x 9.5 cm 12.2 x 22.4 x 3.7 in |
| Weight | 12.2 kg / 26.9 lbs |
| Finish | Matte black |
| ltem no. | 900140264 |

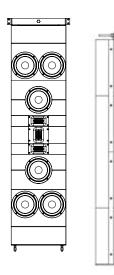


Steinway & Sons IW-66 speaker

| Description | In-wall speaker |
|------------------------|--|
| Frequency response | 70 - 20k Hz |
| Max SPL @ 1m | 120 dB |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 140.0 x 35.0 x 20.0 cm 55.1 x 13.8 x 7.9 in |
| Weight | 44.0 kg / 97.0 lbs |
| Finish | Matte black |
| Item no. | 900130266 |




Steinway & Sons IC-16 speaker

| Description | In-ceiling speaker |
|------------------------|---|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 114 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 57.0 x 31.0 x 10.0 cm 22.4 x 12.2 x 3.9 in |
| Weight | 8.9 kg / 19.6 lbs |
| Finish | Matte black |
| ltem no. | 900140265, 900140266 |
| | |




Steinway & Sons IC-26 speaker

| Description | In-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 116 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 22.0 x 35.0 x 22.5 cm 8.7 x 13.8 x 8.9 in |
| Weight | 11 kg / 24.2 lbs |
| Finish | Matte black |
| Item no. | 900130276 |




Steinway & Sons X-261 speaker

| Description | In-wall, in-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 120 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 57.0 x 31.0 x 9.5 cm 22.4 x 12.2 x 3.7 in |
| Weight | 11.3 kg / 24.9 lbs |
| Finish | Matte black |
| ltem no. | 900130278 |




Steinway & Sons X-262 speaker

| Description | In-wall, in-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 122 dB |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 57.0 x 31.0 x 9.5 cm 22.4 x 12.2 x 3.7 in |
| Weight | 11.3 kg / 24.9 lbs |
| Finish | Matte black |
| ltem no. | 900130279 |
| | |




Steinway & Sons X-261C speaker

| Description | In-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 120 dB |
| Amplification needed | 1 channel |
| Dimensions (H x W x D) | 22.0 x 35.0 x 22.5 cm 8.7 x 13.8 x 8.9 in |
| Weight | 11 kg / 24.2 lbs |
| Finish | Matte black |
| Item no. | 900130280 |



Steinway & Sons X-262C speaker

| Description | In-ceiling speaker |
|------------------------|--|
| Frequency response | 80 - 22k Hz |
| Max SPL @ 1m | 122 dB |
| Amplification needed | 2 channels |
| Dimensions (H x W x D) | 22.0 x 35.0 x 22.5 cm 8.7 x 13.8 x 8.9 in |
| Weight | 11 kg / 24.2 lbs |
| Finish | Matte black |
| ltem no. | 900130281 |



Steinway & Sons Model S-15 table stand


Description

Table stand

Dimensions (H x W x D)

5.3 x 19.0 x 7.7 cm

Finish Item no. 2.1 x 7.5 x 3.0 in Satin silver, matte black 90013038x



Steinway & Sons Model S-15 floor stand

DescriptionBoundary placement and freestanding floor standDimensions (H x W x D)69.3 x 24.6 x 16.6 cmBoundary placement floor stand27.3 x 9.7 x 6.5 inDimensions (H x W x D)69.3 x 24.6 x 24.6 cmFreestanding floor stand27.3 x 9.7 x 9.7 inFinishMatte blackItem no.900130389, 900130390

Steinway & Sons Mounting kit

64.2 x 38.4 x 10.7 cm 25.3 x 15.1 x 4.2 in

Custom colors available

Matte black

900142901

Backbox for Steinway & Sons IC-16 and IW-26 speakers

Bezel-less grill for Steinway & Sons IC-16 and IW-26



Description


Finish

Item no.

Description

Dimensions (H x W x D)







| 17 | V | ſ | |
|----|---|---|--|
| 5 | 5 | | |
| 5 | 1 | | |

| Description | speakers (magnetic) |
|---|---|
| Dimensions (H x W x D) | 64.6 x 38.8 x 0.5 cm 25.4 x 15.2 x 0.2 in |
| Finish | Matte white Custom colors available |
| ltem no. | 900142901 |
| Description | Backbox for Steinway & Sons IW-15 speaker |
| Dimensions (H x W x D) | 33.8 x 27.2 x 10.7 cm 13.3 x 10.7 x 4.2 in |
| Finish | Matte black Custom colors available |
| ltem no. | 900142701 |
| | |
| Description | Bezel-less grill for Steinway & Sons IW-15 speaker (magnetic) |
| Dimensions (H x W x D) | 34 x 27.4 x 0.5 cm 13.4 x 10.8 x 0.2 in |
| Finish | Matte white Custom colors available |
| ltem no. | 900142701 |
| | |
| | |
| Description | Backbox for Steinway & Sons IW-16 speaker |
| Description Dimensions (H x W x D) | Backbox for Steinway & Sons IW-16 speaker 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in |
| | 35.8 x 35.8 x 10.7 cm |
| Dimensions (H x W x D) | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black |
| Dimensions (H x W x D) Finish | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black Custom colors available |
| Dimensions (H x W x D) Finish Item no. | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black Custom colors available 900142801 Bezel-less grill for Steinway & Sons IW-16 speaker |
| Dimensions (H x W x D) Finish Item no. Description | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black Custom colors available 900142801 Bezel-less grill for Steinway & Sons IW-16 speaker (magnetic) 36 x 36 x 0.5 cm |
| Dimensions (H x W x D) Finish Item no. Description Dimensions (H x W x D) | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black Custom colors available 900142801 Bezel-less grill for Steinway & Sons IW-16 speaker (magnetic) 36 x 36 x 0.5 cm 14.2 x 14.2 x 0.2 in Matte white |
| Dimensions (H x W x D) Finish Item no. Description Dimensions (H x W x D) Finish | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black Custom colors available 900142801 Bezel-less grill for Steinway & Sons IW-16 speaker (magnetic) 36 x 36 x 0.5 cm 14.2 x 14.2 x 0.2 in Matte white Custom colors available |
| Dimensions (H x W x D) Finish Item no. Description Dimensions (H x W x D) Finish | 35.8 x 35.8 x 10.7 cm 14.1 x 14.1 x 4.2 in Matte black Custom colors available 900142801 Bezel-less grill for Steinway & Sons IW-16 speaker (magnetic) 36 x 36 x 0.5 cm 14.2 x 14.2 x 0.2 in Matte white Custom colors available |